


**LENS**      LED DOWNLIGHT

**PRODUCT DATASHEET**
**LENS70\_3W\_SQ\_LED\_210**

Recessed LED downlight .  
 Electronic fixed output gear.  
 IP40 from below, IP20 from above, IK05.  
 Complete with 3000K LED.  
 Housing Aluminum with stainless steel part.

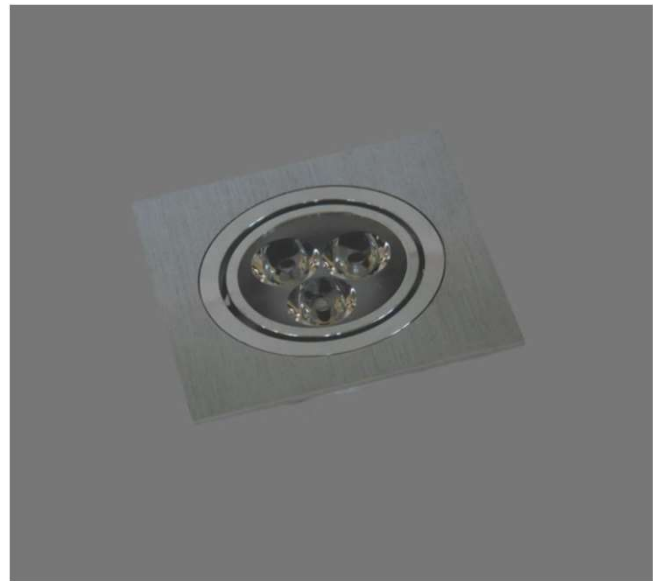

IP40\_IP20

IK05

69,89 lm/W

**TECHNICAL DATA**

SKU:

6005000010

## Electrical data

Nominal wattage	3 W
Operating wattage	2,99 W
Nominal Voltage	165-240 V
Power factor	≥0.50
Mains frequency	50/60 Hz

## Photometrical data

Color temperature (CCT)	3000 K
Luminous efficiency	69,89 lm/W
Luminous flux	209 lm
Color rendering index (CRI)	≥70
Unified Glare Rating (UGR)	<21.5

## Light technical data

Beam angle	60°
------------	-----

## Dimensions and weight

Dimension	111x93x45 mm
Weight Neto	0,162 kg
Cut out hole size	Ø70 mm

## Materials

Body material	Aluminum
Housing color	Steel
Difuser material	Clear polycarbonate, UV-stabilised.

## Operating conditions

Ambient temperature range	-20...+65°C
---------------------------	-------------

## Lifespan

Lifespan L80/B10 at 25°	30000 h
Led Brand	BRIDGELUX
Driver	TOPE (YLQD-6-3)

## Mounting information

Mounting type	Recessed
Mounting location	Ceiling


Capabilities	
Dimmable	No
Type of connection	Wires 2-pole
Standards and Certificates	
Protection class IK	IK05
Type of protection IP	IP40_IP20
Standards	CE, RoHS
Warranty	36 months

## LOGISTICAL DATA

Main package	
Product code	6005000010
Package	Carton
Units in carton	1 pcs
Package diameters, weight bruto	127x100x80 mm ; 0,200 kg
Product EAN code	4772007004751
Second package	
Package	Carton box
Units in second package	40 pcs
Package diameters, weight bruto	520x275x340 mm ; 8,712 kg
ShipPing carton EAN code	-

## ACCESSORIES

## ENERGY EFFICIENCY



## ALL FAMILY PRODUCTS

6005000001 LENS70\_3W\_SQ\_LED\_210  
6005000011 LENS70\_5W\_SQ\_LED\_350

